

SONANCE


INVISIBLE SERIES DATA SHEET

IS15W SUBWOOFER

TECHNICAL SPECIFICATIONS

SKU	93482
UOM	Each
Air Flex Woofer	592in ² (3819cm ²) air pulse diaphragm, 15in (381mm) carbon fiber woofer
Frequency Response	30Hz-250Hz (+/- 3dB)
Nominal Impedance	6 Ohms
Required Amplification	One unbridged channel of DSP 2-750 MKII using IS15W DSP filter
Sensitivity (2.83V/1m)	93dB
Working Temperature Range	0° - 125°F (-17.7° - 51.7°C)
Dispersion	180° hemispherical
Product Dimensions (WxHxD)	32.20" x 32.20" x 3.86" (818mm x 818mm x 98mm)
Mounting Depth	3.39" (86mm)

DIMENSIONAL DRAWINGS

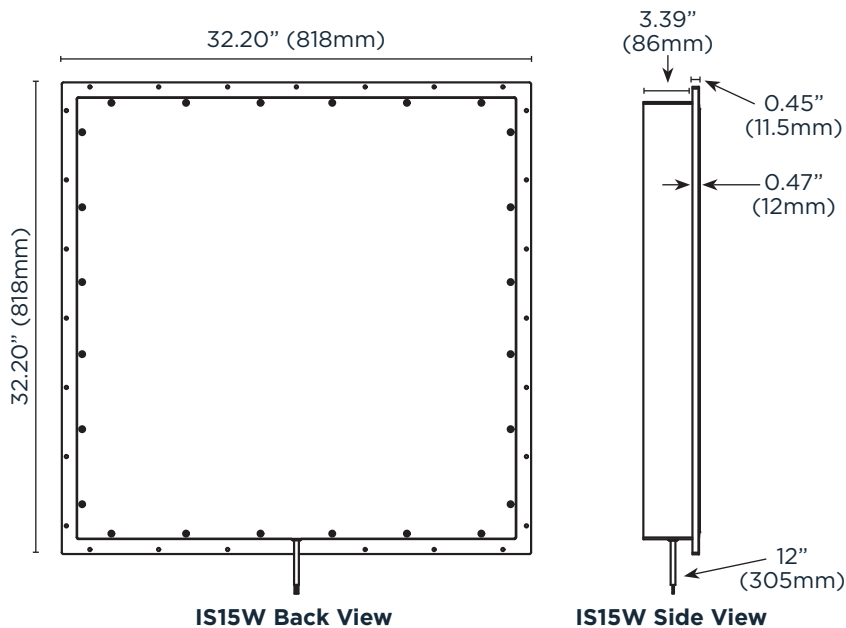

OPTIONAL ACCESSORIES

Space Saver	93495
DG-1 DISC System Depth Gauge	93491

ASSOCIATED PRODUCTS

REQUIRED AMPLIFICATION	
DSP 2-750 MKIII	93540

INVISIBLE SERIES SPEAKERS	
IS10 Speaker	93480
IS8 Speaker	93479
IS6 Speaker	93478

INVISIBLE SERIES WOOFER	
IS10W Woofer	93481

INVISIBLE SERIES COMMERCIAL SPEAKER	
IS8T Speaker	40197

LIMITED FIFTEEN (15) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2021 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.

SONANCE • 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 • www.sonance.com • 10.17.24